

Magnetic drive pumps A worldwide best-seller, our high-quality compact magnetic drive pumps



Magnetic drive seal-less pumps are free from leakage problems and the need for seal replacement. This feature and their compact nature make them ideal for built-in applications.



A worldwide best-seller, our high-quality compact magnetic drive pumps

Our MD series leak-free compact magnetic pumps are a worldwide best-seller and are used in medical equipment, analyzers, constant-temperature baths and surface treatment equipment for chemical feeding in more than thirty countries worldwide.

Leak free

Magnetic drive seal-less pumps are free from leakage problems and the need for seal replacement. This feature and their compact nature make them ideal for built-in applications.

Large selection

The MD series comprises 50 models. The high-head type (MD-Z), the high flow type (MD-X) and threaded connection type (MD-M) are available as well as a standard type. The MD series offers the largest selection in the world.



MD-6



MD-10

MD-6•10 GFRPP

- Max Discharge capacity **5.5 - 11** l/min
- Max Discharge head **1.0 - 2.1** m



MD-15R



MD-20R




MD-30R

MD-15•20•30•40 GFRPP

- Max Discharge capacity **10 - 75** l/min
- Max Discharge head **1.8 - 11.5** m



The centrifugal pump is driven by a pair of magnets which are incorporated in the impeller and motor shaft. The sealless pump structure eliminates shaft seals such as conventional mechanical seals because the pump chamber is shielded by the casings and the impeller is operated by the magnets. The combined coupling torque of the drive magnet and impeller magnet gives sufficient driving power against the motor torque.



Operating Principle

High corrosion-resistance

GFRPP(Glass fiber reinforced polypropylene) wet ends of the MD series handle a wide range of chemicals.

Easy maintenance

The pump unit is comprised of a small number of integrated parts, so maintenance is greatly simplified.



MD-40R



MD-55R



MD-70R



MD-100R

MD-55-70-100 GFRPP

- Max Discharge capacity **40 - 135** l/min
- Max Discharge head **5.6 - 14.3** m


Wide variation Easy maintenance

The MD series has GFRPP wet ends. Hose connections and threaded connections are available. A large selection of models offer a wide flow range of 5.5-135L/min.



Outline of the series (50Hz)


Main Material	Models	Max. discharge capacity (l/min)							Max. discharge head (m)				Limit of specific gravity		
		20	40	60	80	100	120	140	5	10	15	20			
GFRPP	MD-6 Standard type	8.0									1.0				1.2
	MD-6Z High head type	5.5									2.1				1.1
	MD-10 Standard type	11									1.5				1.1
	MD-15R Standard type	16									2.4				1.3
	MD-20R Standard type	27									3.1				1.1
	MD-20RX Large capacity type	46									1.8				1.3
	MD-20RZ High head type	10									4.6				1.1
	MD-30R Standard type	32									3.8				1.3
	MD-30RX Large capacity type	62									2.9				1.1
	MD-30RZ High head type	15									8.0				1.0
	MD-40R Standard type	45									4.6				1.1
	MD-40RX Large capacity type	75									3.3				1.1
	MD-40RZ High head type	22									10				1.0
	MD-40RZ-5	11									11.5				1.0
	MD-55R Standard type	60									5.6				1.2
	MD-55R-5	70									8.2				1.2
	MD-70R Standard type	86									6.7				1.0
	MD-70RZ High head type	40									14.3				1.0
	MD-100R Standard type	120									8.6				1.2
MD-100R-5	135									11.7				1.1	

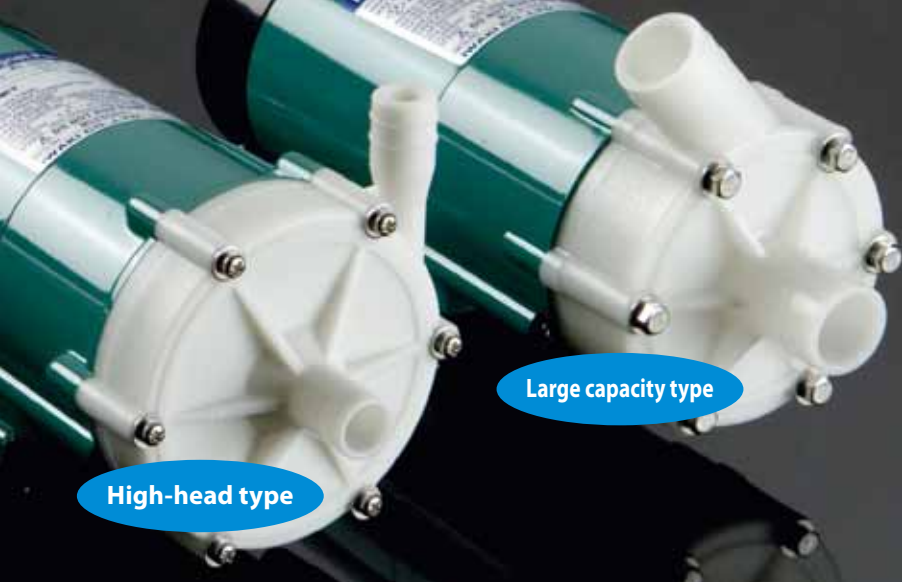

High-head type

Large capacity type

Construction

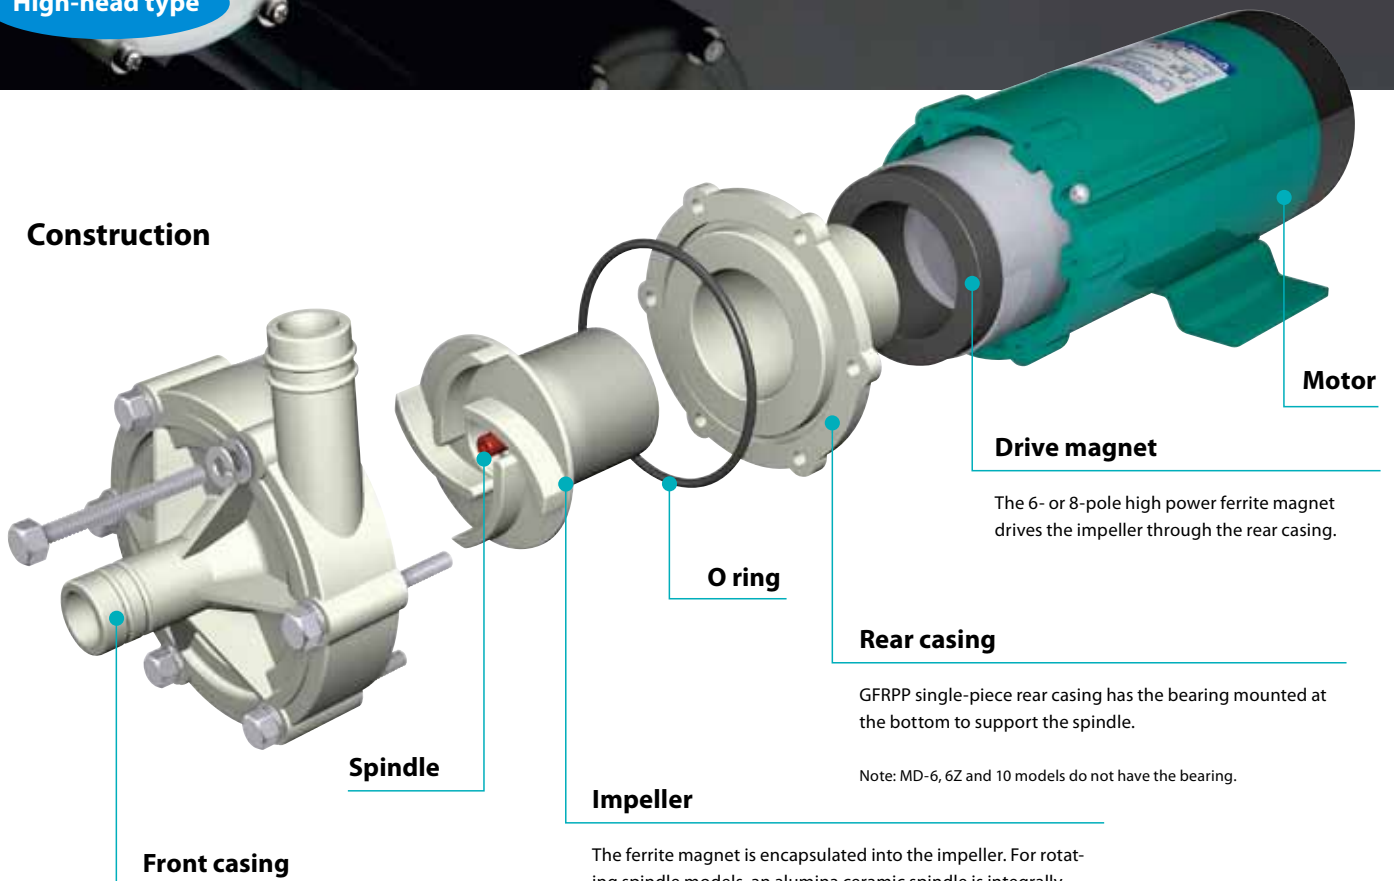

Motor

Drive magnet

The 6- or 8-pole high power ferrite magnet drives the impeller through the rear casing.

Rear casing

GFRPP single-piece rear casing has the bearing mounted at the bottom to support the spindle.

Note: MD-6, 6Z and 10 models do not have the bearing.

O ring

Impeller

The ferrite magnet is encapsulated into the impeller. For rotating spindle models, an alumina ceramic spindle is integrally molded with the impeller. Open, closed or semi-open type impellers can be selected according to performance requirements.

Note: MD-6, 6Z and 10 models use a fixed spindle design.

Spindle

Front casing

Hose or threaded connections can be selected according to application. Also union joints can be installed on threaded connection models.

Note: MD-6, 6Z and 10 models do not have thread connection type.



Hose connection type



Thread connection type



Standard type



High-head type RZ



Large-capacity type RX

MD-6·10

GFRPP

- Range of Max. discharge capacity: **5.5 - 11** L/min
- Range of Max. discharge head: **1.0 - 2.1** m



MD-6

MD-10


Specifications (50Hz)

Model	Hose connection		Max. Capacity L/min	Max.Head m	S.G.	Output W	Input W	Phase	Mass kg
	Inlet (mm)	Outlet (mm)							
MD-6	14	14	8.0	1.0	1.2	3	22	220 - 240V Single phase	0.9
MD-6Z			5.5	2.1	1.1	3	24		
MD-10			11	1.5	1.1	6	35		


• Temperature range: 0 - 80°C (Contact us for applications below zero.) • Limit of viscosity: 30 mPa·s (at 1 S.G.) • Ambient temperature: 0 - 40°C
 • Motor type: Shaded pole motor • MD-6, 6Z and 10 do not have thread connection type.

Construction and materials


Illustration shows model MD-6

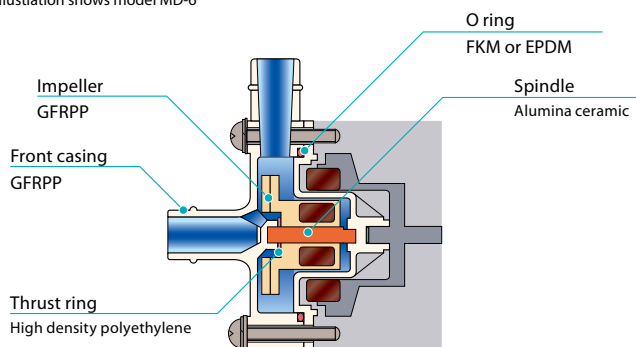

Pump identification

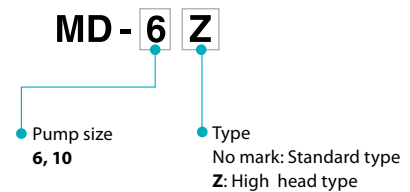


Performance curves (50Hz)

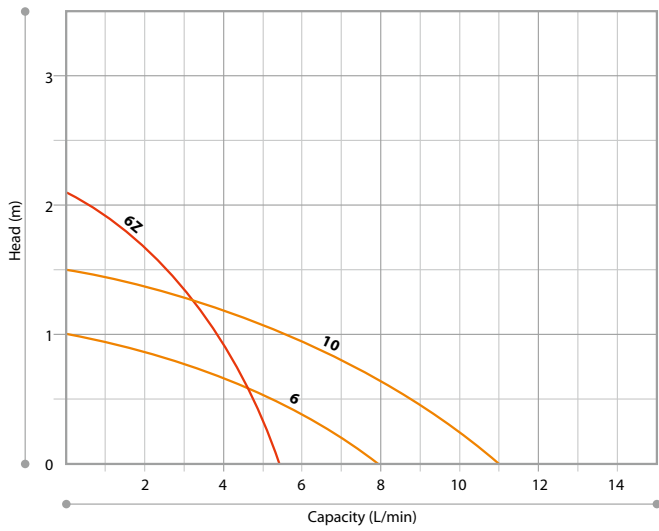


Dimensions (mm)


MD-6



MD-6Z



MD-10



MD-15·20·30·40 GFRPP

- Range of Max. discharge capacity: **10 - 75 L/min**
- Range of Max. discharge head: **1.8 - 11.5 m**



MD-15R

MD-20R

Specifications (50Hz)


Model	Hose connection R · RZ · RX		Threaded connection R-M · RZ-M · RX-M		Max. Capacity (L/min)	Max. Head (m)	S.G.	Output (W)	Input (W)	Power source	Mass (kg)
	Inlet (mm)	Outlet (mm)	Inlet/Outlet	Union (mm) ^(Note1)							
MD-15R(M)	14	14	G3/4	13	16	2.4	1.3	10	26	220V - 240V Single phase	1.6
MD-20R(M)	18	17	G3/4	16	27	3.1	1.1	20	40		2.0
MD-20RX(M)	26	26	G1	20	46	1.8	1.3				
MD-20RZ(M)	17.5	17	G3/4	13	10	4.9	1.1				
MD-30R(M)	20	20	G3/4	16	32	3.8	1.3	45	60		3.5
MD-30RX(M)	26	26	G1	20	62	2.9	1.1		70		
MD-30RZ(M)	17.5	17	G3/4	13	15	8.0	1.0				
MD-40R(M)	20	20	G3/4	16	45	4.6	1.1	65	90		3.9
MD-40RX(M)	26	26	G1	20	75	3.3			85		
MD-40RZ(M)	20	20	G3/4	16	22	10			140		
MD-40RZ-5(M)					11	11.5	1.0	65	140		

• Temperature range: 0 - 80°C (Contact us for applications below zero.) • Limit of viscosity: 30 mPa·s (at 1 S.G.) • Ambient temperature: 0 - 40°C
 • Motor type: Capacitor-run induction motor


Note 1: The union size on above table shows the nominal diameter of the applicable PVC pipe. Heat resistance of the standard union is 0 - 55°C.

Construction and materials

Illustration shows model MD-30R

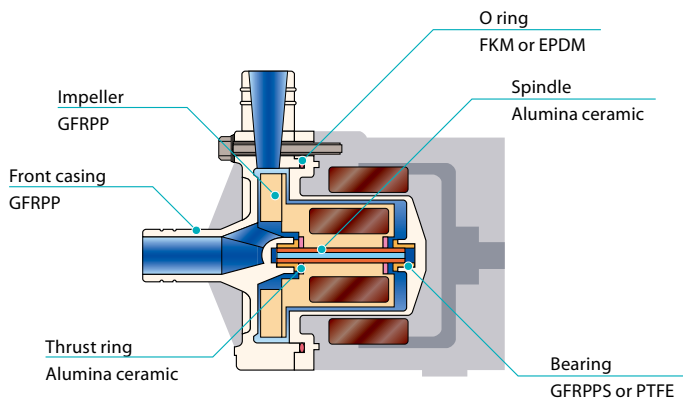

Pump identification

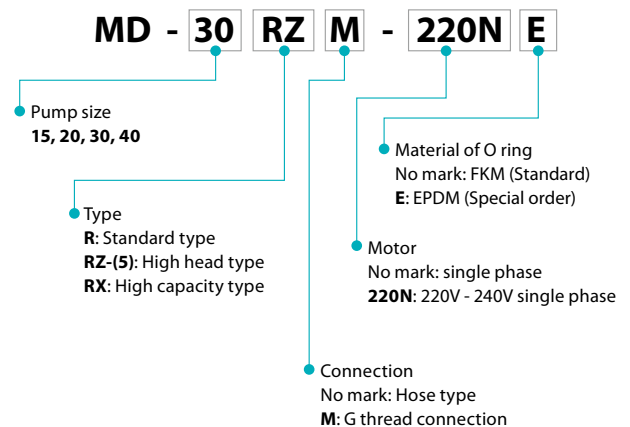

30

MD-30R




40

MD-40R




Performance curves (50Hz)

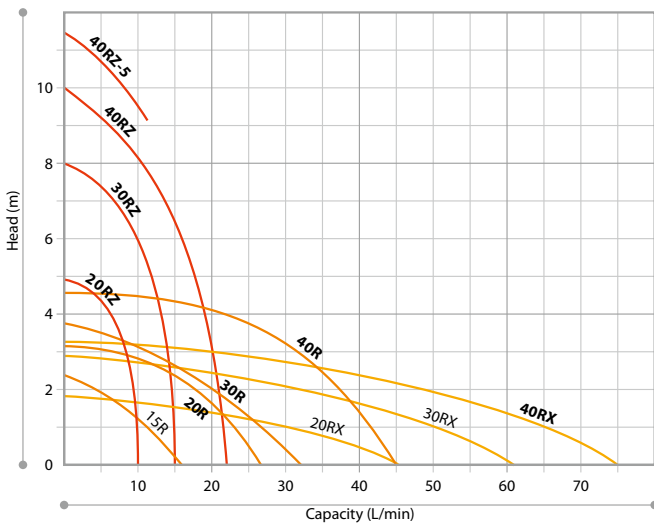

Dimensions (mm)

MD-15R(M)-20R(M)-30R(M)-40R(M)

Illustration shows MD-30R

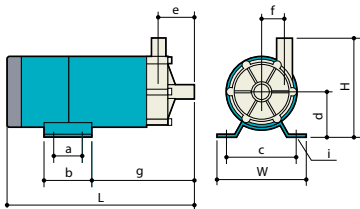


Model	W	H	L	a	b	c	d	e	f	g	i
MD-15R(M)	95	109 (114)	189 (179)	-	50	68	55	39	22	92	2 - ϕ 5.6
MD-20R(M)	106	105 (107)	209 (203)	44	60	90	45	39 (33)	29	94 (88)	4 - 6x10
MD-30R(M)	120	130	248	40	64	100	60	48	31	137	4 - ϕ 9
MD-40R(M)			250								

Note1: Dimension of the () inside are thread connection type.


MD-20RZ(M)-30RZ(M)-40RZ(M)

Illustration shows MD-20RZ



MD-20RX(M)-30RX(M)-40RX(M)

Illustration shows MD-40RX



Model	W	H	L	a	b	c	d	e	f	g	i
MD-20RZ(M)	106	125	211	44	60	90	55	40	39	98	4 - 6x10
MD-30RZ(M)			230							120	
MD-40RZ(M)	120	150	241	40	64	100	60	39	45	128	4 - ϕ 9
MD-40RZ-5(M)										128	
MD-20RX(M)	106	119 (122)	220	44	60	90	45	47	-	105	4 - 6x10
MD-30RX(M)		137 (140)								254	
MD-40RX(M)	120	137 (141)	256	40	64	100	60	50	-	143	4 - ϕ 9

Note1: Dimension of the () inside are thread connection type.

Note2: RZ type (Hose connection) and RZM type (Thread connection type) are the same dimensions.

MD-55.70.100

GFRPP

- Range of Max. discharge capacity: **40 - 135 L/min**
- Range of Max. discharge head: **5.6 - 14.3 m**



MD-55R

55

7

Specifications (50Hz)


Model	Hose connection R · RZ		Threaded connection R-M · RZ-M		Max. Capacity (L/min)	Max. Head (m)	S.G.	Output (W)	Input (W)	Power source		Mass (kg)
	Inlet (mm)	Outlet (mm)	Inlet/Outlet	Union (mm) ^(Note1)						Single phase	Three phase	
MD-55R(M)	26	26	G1	20	60	5.6	1.2	90	130	220V - 240V	-	5.4
MD-55R-5(M)					70	8.2		90	170			
MD-70R(M)	26	26	G1	20	86	6.7	1.0	150	235		400V/440V	6.0
MD-70RZ(M)					20	20		G3/4	16			
MD-100R(M)	26	26	G1	20	120	8.6	1.2	260	245	400V/440V	8.5	
MD-100R-5(M)					135	11.7		1.1	260			365

• Temperature range: 0 - 80°C (Contact us for applications below zero.) • Limit of viscosity: 30 mPa·s (at 1 S.G.) • Ambient temperature: 0 - 40°C
 • Motor type: Capacitor-run induction motor


Note 1: The union size on above table shows the nominal diameter of the applicable PVC pipe.
 Heat resistance of the standard union is 0 - 55°C and that of the heat resistant union is 0 - 80°C.

Construction and materials

Illustration shows model MD-100R

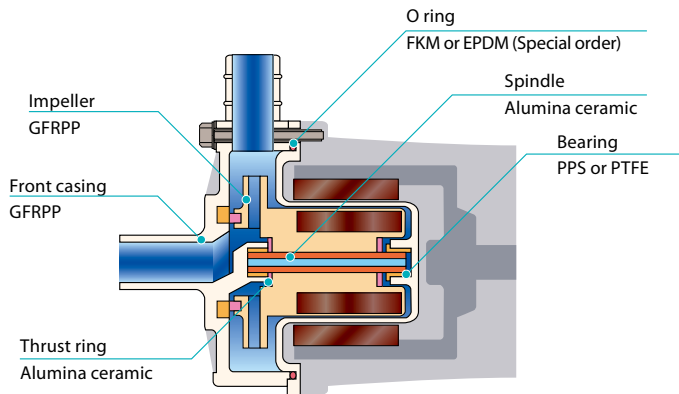

Pump identification

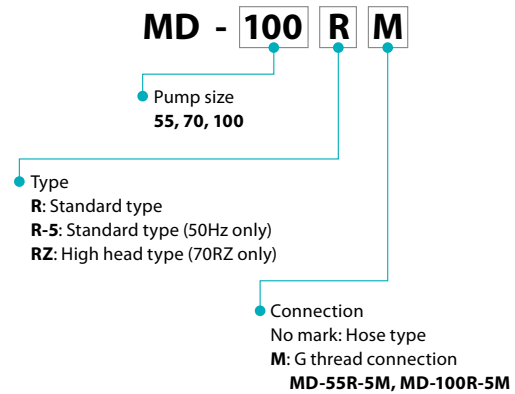


Note3: Specify the pump model and power specification at an inquiry phase.

0 100

MD-70R

MD-100R


Performance curves (50Hz)

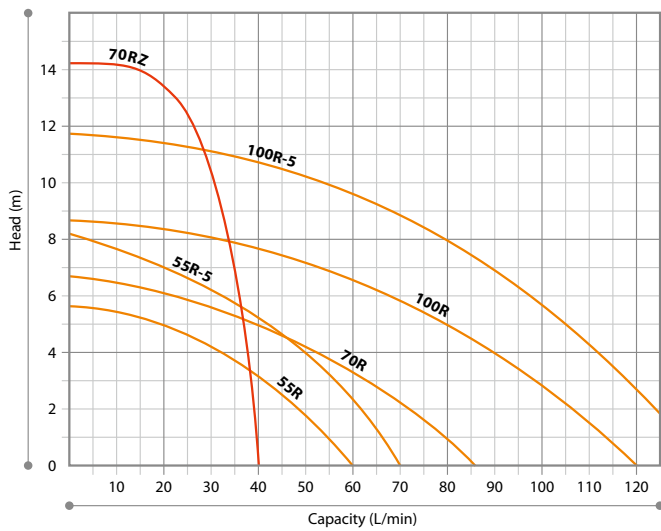


Dimensions (mm)

MD-55R-55R-5(M)

Illustration shows MD-55R

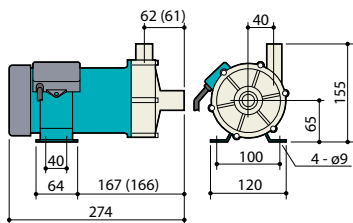


MD-70R(M)

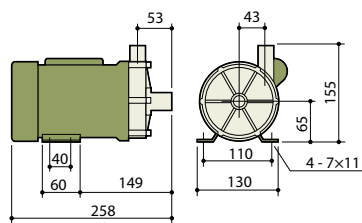


MD-70RZ(M)

(): Thread connection type

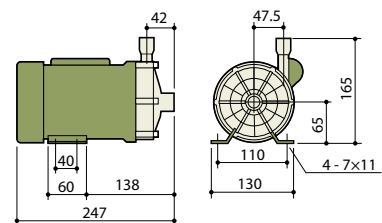

MD-100R-100R-5(M)

Illustration shows MD-100R

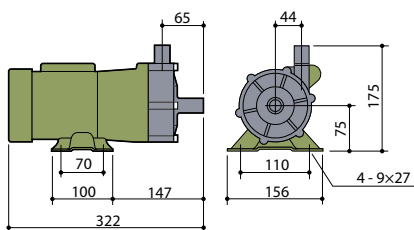

Special accessories

• Union joint

Special-purpose union joints are available to cope with three types (13mm, 16mm and 20mm dia.) of piping. Tight sealing O-rings are used to prevent thread damage caused by over-tightening.



• Self-priming chamber

Once fill up liquid, repriming is not required. It is very easy to use MD pump with self-priming chamber.



Specifications

Model	13A	16A	20A
Material	PVC	PVC	PVC
Range of temp.	0 - 55°C	0 - 55°C	0 - 55°C
Material of O ring	FKM or EPDM		

Specifications

Model	SC-4V	SC-4E	SC-7V	SC-7E
Material of O ring	FKM	EPDM	FKM	EPDM
Connection	G3/4		G1	
Suction limit	0.8 m		1.2 m	
Range of tank	0.8 L		1.3 L	
Applicable pump	MD-30RM, MD-40RM		MD-70RM	

Note: Self-priming height depends on liquid temperature and characteristics.

Compact & Lightweight

The canned motor pump offers a solution for built-in application

Direct drive pumps RD series

- Lightweight & sealless structure
- Plastic canned motor pump
- DC 24 V brushless motor
- Employ built-in type driver for the motor
- The variable flow and pressure control by DC 1 to 5 V signal
- Corresponds to high temperature range Max. 80°C
- The connection of three types can be chosen, thread, hose and quick fastener.



RD-12



RD-30

MD-55R-(5)(M), 70R(Z)(M), 100R-(5)(M)

Available with IEC frame motors



This type of unit allows the pumps to be supplied with numerous motor options.

MD-6Z-D2 (DC24V type)

Capable of flow adjustment by changing power supply voltage (and allows the user to easily comply with international standards such as CE, UL and CSA.)

Max. discharge capacity: 6 l/min.
Max. discharge head: 2.7 m
Temperature range: 0 to 50°C
Supplied power: DC8V to 24V



www.iwakipumps.jp

IWAKI CO.,LTD. 6-6 Kanda-Sudacho 2-chome Chiyoda-ku Tokyo 101-8558 Japan TEL : (81)3 3254 2935 FAX : 3 3252 8892

EUROPE / U.S.A.

European office : IWAKI Europe GmbH
Holland : IWAKI Europe (NL Branch)
Austria : IWAKI (Austria) GmbH
Belgium : IWAKI Belgium N.V.
Denmark : IWAKI Nordic A/S
Finland : IWAKI Suomi Oy
France : IWAKI France S.A.
Germany : IWAKI Europe GmbH
Italy : IWAKI Italia S.R.L.
Norway : IWAKI Norge AS
Spain : IWAKI Iberica Pumps, S.A.
Sweden : IWAKI Sverige AB
Switzerland : IWAKI (Schweiz) AG
U.K. : IWAKI Pumps (UK) Ltd.
U.S.A. : IWAKI America Inc.
Argentina : IWAKI America Inc. (Argentina Branch)

TEL: (49)2154 9254 0 FAX: 2154 9254 48
TEL: (31)547 293 160 FAX: 547 292 332
TEL: (41)26 674 93 00 FAX: 26 674 93 02
TEL: (32)13 67 02 00 FAX: 13 67 20 30
TEL: (45)48 24 2345 FAX: 48 24 2346
TEL: (358)9 2745810 FAX: 9 2742715
TEL: (33)1 69 63 33 70 FAX: 1 64 49 92 73
TEL: (49)2154 9254 50 FAX: 2154 9254 55
TEL: (39)0444 371115 FAX: 0444 335350
TEL: (47)66 81 16 60 FAX: 66 81 16 61
TEL: (34)943 630030 FAX: 943 628799
TEL: (46)8 511 72900 FAX: 8 511 72922
TEL: (41)26 674 93 00 FAX: 26 674 93 02
TEL: (44)1743 231363 FAX: 1743 366507
TEL: (1)508 429 1440 FAX: 508 429 1386
TEL: (54)11 4745 4116

ASIA / OCEANIA

Australia : IWAKI Pumps Australia Pty Ltd. TEL: (61)2 9899 2411 FAX : 2 9899 2421
China : TEL: (852)2607 1168 FAX: 2607 1000
Hong Kong : IWAKI Pumps Co., Ltd. TEL: (86)21 6272 7502 FAX: 21 6272 6929
Shanghai : IWAKI Pumps (Shanghai) Co., Ltd. TEL: (86)20 8435 0603 FAX: 20 8435 9181
Guangzhou : GFTZ IWAKI Engineering & Trading Co., Ltd. TEL: (86)10 6442 7713 FAX: 10 6442 7712
Beijing : GFTZ Iwaki Engineering & Trading Co., Ltd. (Beijing office) TEL: (82)2 2630 4800 FAX: 2 2630 4801
Korea : IWAKI Korea Co.,Ltd. TEL: (60)3 7803 8807 FAX: 3 7803 4800
Malaysia : IWAKIm Sdn. Bhd. TEL: (65)6316 2028 FAX: 6316 3221
Singapore : IWAKI Singapore Pte Ltd. TEL: (62)21 6906606 FAX: 21 6906612
Indonesia : IWAKI Singapore (Indonesia Branch) TEL: (886)2 8227 6900 FAX: 2 8227 6818
Thailand : IWAKI Pumps Taiwan Co., Ltd. TEL: (66)2 322 2471 FAX: 2 322 2477
Taiwan : IWAKI (Thailand) Co.,Ltd. TEL: (84)613 933456 FAX: 613 933399
Vietnam : IWAKI Pumps Vietnam Co., Ltd.

()Country codes

Caution for safety use: Before use of pump, read instruction manual carefully to use the product correctly.

Actual pumps may differ from the photos. Specifications and dimensions are subject to change without prior notice. For further details please contact us.

Legal attention related to export.

Our products and/or parts of products fall in the category of goods contained in control list of international regime for export control. Please be reminded that export license could be required when products are exported due to export control regulations of countries.

